


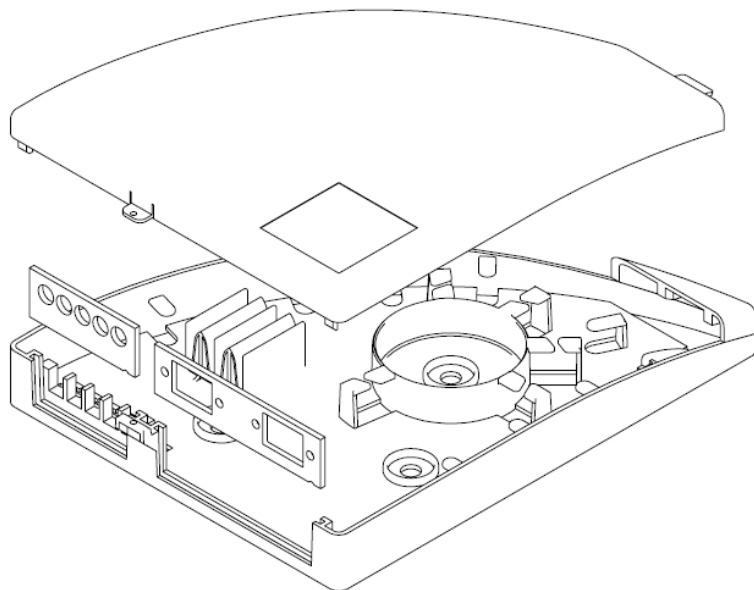

CZ

Technický popis:

Optický rozváděč ORM 2 je určen pro umístění 2ks optických konektorů na ukončení světlovodné sítě nebo pro vzájemné propojení optických kabelů. Rozváděč lze použít k připojení počítačů, různých periferních zařízení, případně dalších přístrojů propojovacími kabely. Je určen pro instalaci ve vnitřním prostředí na zeď. Rozváděč má možnost výstupů a vstupů v rozsahu přibalených panelů.

Typ:

ORM 2

Vstupy a výstupy:

Výměnné panely: mikrotubička ø5mm
 mikrotubička ø3mm
 opto kabely max. ø5mm
 2x FC
 2x E2000
 2x SC/LC
 1x SC DUPLEX
 2x ST

Rozměry:

140x109x23mm

Hmotnost:

cca 0,1kg

Obsah balení:

Páska upínací PVC 2.5x100mm

Hmoždinky

Vruty

Průvodní list

6ks

2ks

2ks

1ks

Prohlášení o způsobilosti výrobku:

Výrobek byl vyroben dle platné technické dokumentace. Při jeho výrobě byly dodrženy stanovené technologické postupy a byl použit předepsaný materiál v souladu s normou ISO 9001.

Záruka:


Výrobce ručí za vady výrobku vzniklé v záruční době prokazatelně vadným materiálem, chybnou konstrukcí nebo vadným provedením. Tyto vady výrobce odstraní bezplatně. Výrobce je oprávněn reklamaci zamítnout, jestliže bylo zařízení v záruční době prokazatelně poškozeno neodborným zásahem, hrubým zacházením, vandalismem a zásahem vyšší moci. Záruční doba je 24 měsíců (pokud není stanovena jinak) ode dne odeslání výrobku zákazníkovi. Záruka se vztahuje na funkčnost výrobku a způsobilost ke smluvenému příp. obvyklému účelu.

Poznámka:


Provedení výrobku se podle přání zákazníka mohou lišit použitým materiálem, povrchovou úpravou, vnitřní výbavou, apod. Hmotnost jednotlivých provedení výrobku může být rozdílná. Micos spol. s r.o. má výhradní právo zdokonalovat a vyvíjet své produkty na základě požadavků zákazníka. V tomto dokumentu nemusí být všechny vývojové změny zaznamenány. Obrázek je pouze ilustrativní.

Postup při montáži:


1. Sada ORM 2.

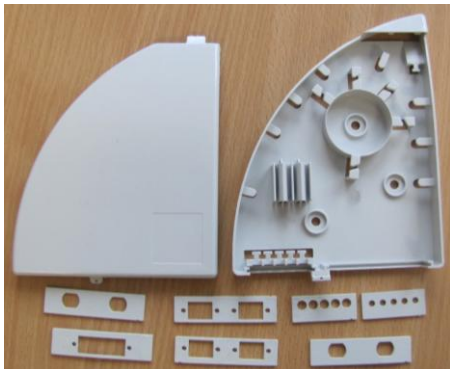


3. Spodní díl krabičky upevněte dvěma vruty.

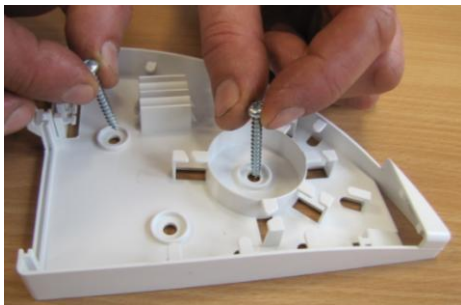


5. Z příbalu vyjměte konektorový panel. Do něj nacvakněte nebo přišroubujte opto adaptéry a nasadte jej do spodního dílu krabičky.

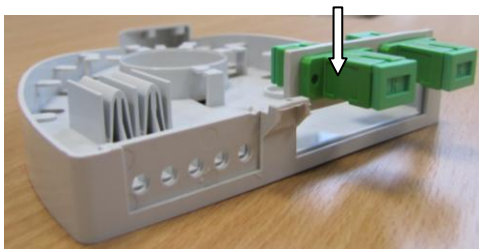


2. Sejměte víko.

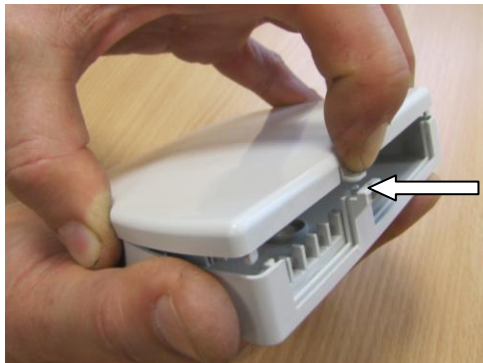

4. Z příbalu vyjměte panel pro vstup/výstup mikrotrubiček, opto kabelů a nasadte jej do spodního dílu krabičky.

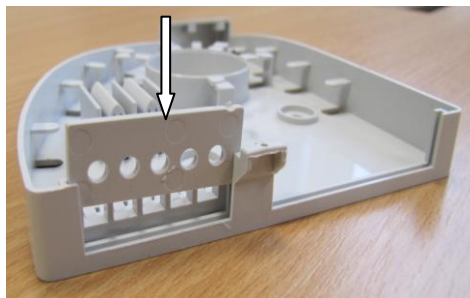


6. Do panelu vstup/výstup vsuňte mikrotrubičky nebo opto kabely a zafixujte je pomocí PVC pásků.

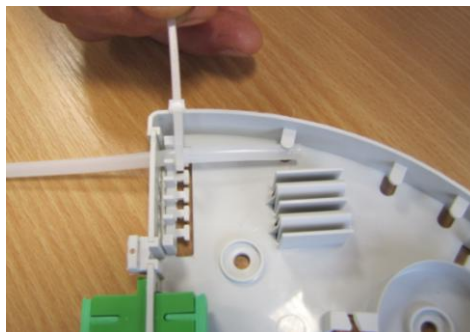


7. Odstraňte vhodným nástrojem vnější plášť z konce kabelu a očistěte jej od případného gelu v délce min. 2 m.



8. Zajistěte minimální poloměr ohybu optických vláken. Proveďte svaření optických vláken, použijte teplem smrštitelnou ochranu délky l=40mm, uložte sváry do držáků.

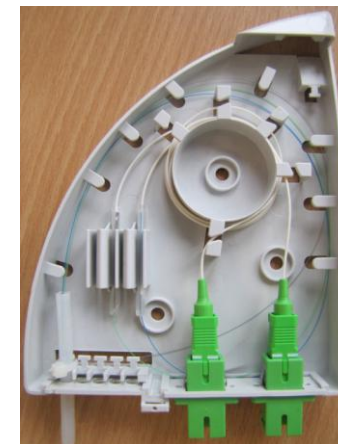

9. Nasadte víko.

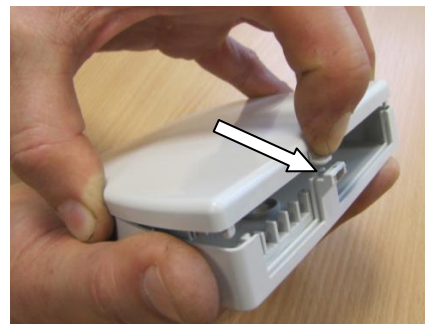

10. Práce uvedené v odstavci 1 - 9 může provádět pouze oprávněná osoba.

GB

Technical description:

Optical distribution box ORM 2 is designed to house two optical connectors for the termination of an optical network at a site, or to interconnect optical cables. The distribution box may be used for connecting computers, different peripherals or other equipment using connecting cables. It is appropriate to be wall-mounted indoors. The distribution box offers inputs and outputs depending on the panels supplied.

Type:	ORM 2
Inputs and outputs:	Interchangeable panels: Microduct ø5mm Microduct ø3mm Optical cables max. ø5mm 2x FC 2x E2000 2x SC/LC 1x SC DUPLEX 2x ST
Dimensions:	140x109x23mm
Weight:	c. 0,1kg

Accessories:

PVC fastening tape 2.5x100mm	6pcs
Dowel pins	2pcs
Wood screws	2pcs
Accompanying document	1pc

Declaration on product conformance:

The product was manufactured in compliance with valid technical documentation. An observation of designed technology procedures and material was followed according to the ISO 9001 standard.

Warranty:

The manufacturer guarantees for product imperfections arising within period of warranty due to the demonstrably deficient material, error in design, or deficiencies in manufacture. Such deficiencies shall be repaired by the manufacturer free of charge. The manufacturer is authorized to reject the complaint if the item was demonstrably damaged due to an unqualified infringement, rough manipulation, or by force majeure. The warranty period is 24 months (if not stated other way) starting from the date of product consignment to the customer. The warranty covers the product capability and conformance with agreed, or usual purpose.

Note:


The product design may vary according to the requirement of the customer. The weight of single product execution may vary. Manufacturer is authorised to develop its products according to the requirements of the customer. Recording of all developing changes in this document is not necessary. Picture is only informative. The assembly may be accomplished by authorized person only.

Kontakt na výrobce / Contact:


MICOS spol. s r.o. divize TELCOM
Vápenice 17
796 01 Prostějov, Česká republika / Czech Republic
tel.: +420 582 307 111, fax.: +420 582 331 919
E-Mail: telcom@micos.cz; www.micos.cz

Assembly procedure:


1. Set ORM 2.

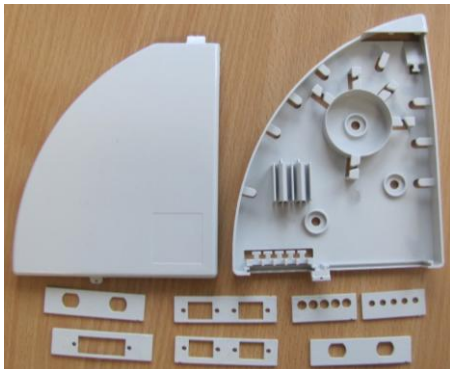


3. Fix the base with 2 screws.

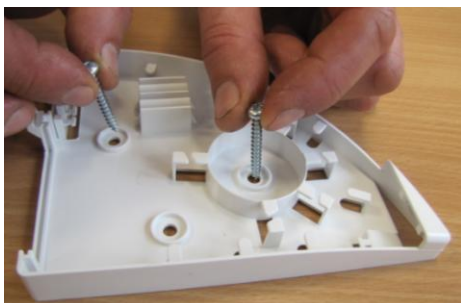


5. Choose suitable panel for connector(s). Click or screw required adapter and slide it into a bottom of ORM2.

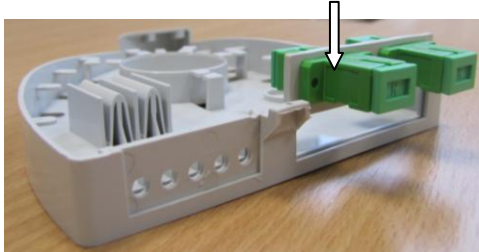


2. Remove the cover.

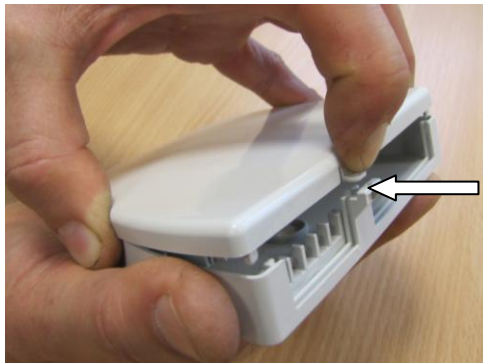

4. Choose suitable panel for incoming micro-tube or micro-cable and slide it into a bottom part of ORM2.

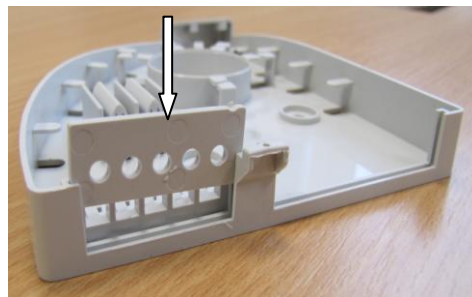


6. Fix the incoming micro-tube or micro-cable using PVC draw band.

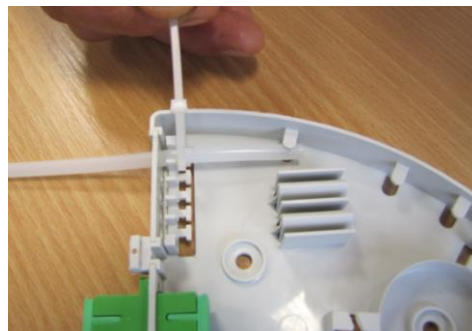


7. Using an appropriate tool, remove the external sheathing from the cable end and clean the gel, if any, along at least 2 m.



8. Comply with min. band radius. Splice the fibres and place them in 40mm heat shrink protection. Fix the heat shrink splices into a splice holder.

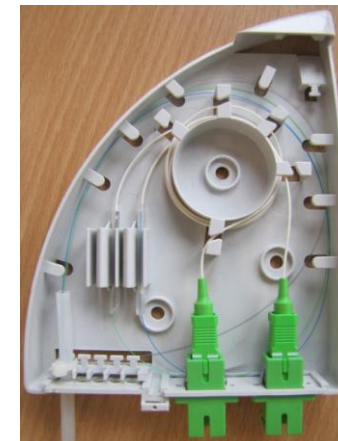

9. Fit the cover back.

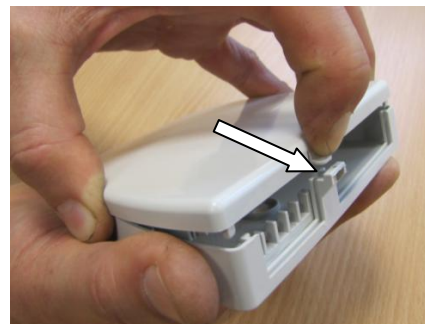

10. The operations specified in Paragraphs 1-9 may only be performed by an authorized technician.