

pro domácnost

Model/typ	Velikost otvoru (mm)	Výkon (m ³ /h)	Příkon (W)	Max. tlak (Pa)	dB (A) 3 m	Váha (kg)
-----------	----------------------	---------------------------	------------	----------------	------------	-----------

Axiální ventilátory pro instalaci na stěnu a do stropu 220-240V~ 50Hz, IP 34



Bravo 100	100	101	14	35	35	0,56
Bravo 100T	100	101	14	35	35	0,56
Bravo 100S	100	101	14	35	35	0,56
Bravo 100H	100	101	14	35	35	0,56
Bravo 125	125	192	16	56	37	0,73
Bravo 125T	125	192	16	56	37	0,73
Bravo 125S	125	192	16	56	37	0,73
Bravo 125H	125	192	16	56	37	0,73
Bravo 150	150	305	24	86	39	0,90
Bravo 150T	150	305	24	86	39	0,90
Bravo 150S	150	305	24	86	39	0,90
Bravo 150H	150	305	24	86	39	0,90



Axiální ventilátory pro instalaci na stěnu a do stropu 220-240V~ 50Hz, IP 34

Aero 100	100	102	14	37	38	0,42
Aero 100T	100	102	14	37	38	0,42
Aero 100S	100	102	14	37	38	0,42
Aero 100H	100	102	14	37	38	0,42
Aero 125	125	193	16	58	39	0,56
Aero 125T	125	193	16	58	39	0,56
Aero 125S	125	193	16	58	39	0,56
Aero 125H	125	193	16	58	39	0,56
Aero 150	150	309	24	89	40	0,83
Aero 150T	150	309	24	89	40	0,83
Aero 150S	150	309	24	89	40	0,83
Aero 150H	150	309	24	89	40	0,83



Axiální ventilátory s automatickou žaluzií pro instalaci na stěnu a do stropu 220-240V~ 50Hz, IP24

Auto 100	100	98	18	35	34	0,56
Auto 100T	100	98	18	35	34	0,56
Auto 100S	100	98	18	35	34	0,56
Auto 100H	100	98	18	35	34	0,56
Auto 125	125	185	22	55	35	0,73
Auto 125T	125	185	22	55	35	0,73
Auto 125S	125	185	22	55	35	0,73
Auto 125H	125	185	22	55	35	0,73
Auto 150	150	295	26	88	39	0,90
Auto 150T	150	295	26	88	39	0,90
Auto 150S	150	295	26	88	39	0,90
Auto 150H	150	295	26	88	39	0,90





Axiální ventilátory pro instalaci do potrubí 220-240V~ 50Hz, IP X4

Tubo 100	100	137	16	44	38	0,55
Tubo 100T	100	137	16	44	38	0,55
Tubo 125	125	245	22	67	39	0,69
Tubo 125T	125	245	22	67	39	0,69
Tubo 150	150	361	30	102	40	0,90
Tubo 150T	150	361	30	102	40	0,90

T - časovač • S - ovládání šňůrkovým spínačem • H - časovač a senzor vlhkosti

DEKORAČNÍ MŘÍŽKY a příslušenství

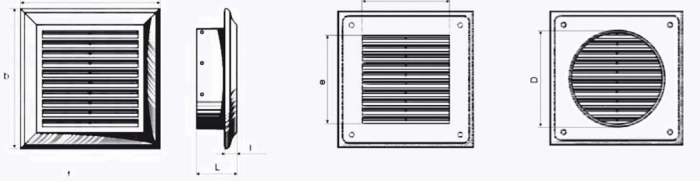Model/typ	Rozměry (v mm)					
		a	b	L	l	e x f



Dekorační mřížka čtyřhranná pro otvor \varnothing 100 a 120 mm

DECOR 140x140/100	140	140	40,5	12,5	100x100	100
DECOR 140x300/100	140	300	40,6	12,6	100x255	100
DECOR 180x180/125	180	180	40,6	12,6	138x138	125
DECOR 180x250/125	180	250	40,6	12,6	138x208	125



Dekorační mřížka čtyřhranná

DECOR 140x140	140	140	40,5	12,5	100x100
DECOR 140x300	140	300	40,6	12,6	100x255
DECOR 180x180	180	180	40,6	12,6	138x138
DECOR 180x250	180	250	40,6	12,6	138x208



Gravitační mřížka čtyřhranná

DECOR 140x140G	140	140	40,5	12,5	100x100
DECOR 140x300G	140	300	40,6	12,6	100x255
DECOR 180x180G	180	180	40,6	12,6	138x138
DECOR 180x250G	180	250	40,6	12,6	138x208



Žaluziová mřížka otevíraná šňůrkou, čtyřhranná

DECOR 140x140R	140	140	40,5	12,5	100x100
DECOR 140x300R	140	300	40,6	12,6	100x255
DECOR 180x180R	180	180	40,6	12,6	138x138
DECOR 180x250R	180	250	40,6	12,6	138x208



Dekorační mřížka kruhová pro otvor \varnothing 80, 100, 125 a 150 mm

	a	L	D	l
DECOR 80S	123	42	80	14
DECOR 100S	140	42	100	14
DECOR 125S	165	42	125	14
DECOR 150S	188	42	150	14



Zpětná klapka pro ventilátor 100, 125 a 150 mm

	D	L
KO 100	100	14
KO 125	125	14
KO 150	150	14